
Cibes Lift Thailand Technical Specifications Brochure

Technical specifications Cibes Classic / Voyager / Challenger


Product name	Cibes Classic	Cibes Voyager	Cibes Challenger
Installation	Indoor/outdoor	Indoor/outdoor	Indoor/outdoor
Rated load	300/400/500 kg	300/400/500 kg	300/400/500 kg
Power supply	3 x 400 VAC 50 Hz 20 A, 1 x 230 VAC	3 x 400 VAC 50 Hz 20 A, 1 x 230 VAC	3 x 400 VAC 50 Hz 20 A, 1 x 230 VAC
Speed	Max 0.15 m/s	Max 0.15 m/s	Max 0.15 m/s
Top height	2250/1100 mm (door/gate)	2250/1300 mm (door/gate)	2250/1300 mm (door/gate)
Min headroom	2300 mm (door)	2300 mm (door)	2300 mm (door)
Pit depth	60 mm	60 mm	60 mm
Directives & Standards	MD 2006/42/EC, EN 81-41, SIL3 (Safety Integrity Level 3)	MD 2006/42/EC, EN 81-41, SIL3 (Safety Integrity Level 3)	MD 2006/42/EC, EN 81-41, SIL3 (Safety Integrity Level 3)
Drive system	Screw and nut	Screw and nut	Screw and nut
Lift controls	One touch operation in platform and on landings	One touch operation in platform and on landings	One touch operation in platform and on landings
Control system	Micro computer based SIL3 (Safety Integrity Level 3)	Micro computer based SIL3 (Safety Integrity Level 3)	Micro computer based SIL3 (Safety Integrity Level 3)
Motor power	1.5 kW /2.2 kW	1.5 kW /2.2 kW	1.5 kW /2.2 kW
Machine room	Machine room less (MRL)	Machine room less (MRL)	Machine room less (MRL)
Max number of stops	6	6	6
Max travel	20 m	20 m	20 m
Door configuration	Single hinged doors (L/R), single entry, open-through or adjacent access		
Safety	Safety edges for the top of the platform and floor, overload protection, emergency stop and alarm button, telephone and battery emergency lowering are included as standard, various lock solutions and fire drive are available as options.		
Lift shaft	Tempered and laminated safety glass (4.0 mm + 0.76 mm PVB foil + 4.0 mm) or steel panels.		

Platform size	Available for lift models	Platform (mm)		Shaft Size (mm)		Cut out size (mm)	
		Width	Depth	Width	Depth	Width	Depth
XS	Cibes Classic/Voyager/Challenger	600	830	960	882	1000	993
S1	Cibes Classic/Voyager/Challenger	800	830	1160	882	1200	993
S2	Cibes Classic/Voyager/Challenger	900	830	1260	882	1300	993
S3	Cibes Classic/Voyager/Challenger	1000	830	1360	882	1400	993
S4	Cibes Classic/Voyager/Challenger	800	930	1160	982	1200	1093
S5	Cibes Classic/Voyager/Challenger	900	930	1260	982	1300	1093
S6	Cibes Classic/Voyager/Challenger	1000	930	1360	982	1400	1093
S7	Cibes Classic/Voyager/Challenger	1100	930	1460	982	1500	1093
M1	Cibes Classic/Voyager/Challenger	800	1250	1160	1265	1200	1380
M2	Cibes Classic/Voyager/Challenger	900	1250	1260	1265	1300	1380
M3	Cibes Classic/Voyager/Challenger	1000	1300	1360	1315	1400	1430
M4	Cibes Classic/Voyager/Challenger	1000	1400	1360	1415	1400	1530
L1	Cibes Classic/Voyager/Challenger	1100	1400	1460	1415	1500	1530
L2	Cibes Classic/Voyager/Challenger	900	1500	1260	1515	1300	1630
L3	Cibes Classic/Voyager/Challenger	1000	1500	1360	1515	1400	1630
L4	Cibes Classic/Voyager/Challenger	1100	1500	1460	1515	1500	1630
XL	Cibes Classic/Voyager/Challenger	1100	1600	1460	1645	1500	1760

Note: Shaft and cut out sizes may vary depending on lift configuration. For exact measurements, please ask Cibes for project specific drawings.

Door models

Door glazing in laminated and tempered safety glass.

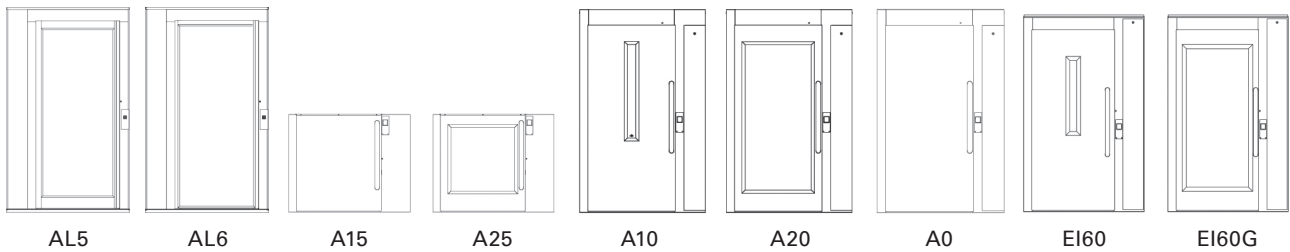

Doors for Cibes Classic/Voyager/Challenger								
Door model	A20	A10/A0	AL5	AL6	EI60 ¹	EI60G ¹	A25	A15
Door type	Single hinged	Single hinged	Single hinged	Single hinged	Single hinged	Single hinged	Single hinged	Single hinged
Material	Steel	Steel	Aluminium	Aluminium	Steel	Steel	Steel	Steel
Standard finish	RAL 9016	RAL 9016	Natural alum.	Natural alum.	RAL 9016	RAL 9016	RAL 9016	RAL 9016
Glass (w×h) ² mm	715×1573	90×1010/0	775×1835	825×1998	75×800	700×1563	710×710	-
Concealed opener	Option	Option	Option	Option	-	-	Option	Option
Ext. fitted opener	-	-	-	-	Option	Option	-	-
Customised w×h	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

¹ Fire rated EI60 according to standard EN 81-58. Fire rated doors must always be combined with a site-built shaft with equivalent/superior fire rating, depending on your local regulations.

² Glass dimensions for doors/gates with a clear opening of 900×2000/900×1100/1300 mm, 900×2070 mm for the AL5/AL6 doors.

Cibes Classic



Voyager




Challenger




Cibes platform lift sizes

size XS Cibes Classic/Voyager/Challenger W×D (mm)	
Platform size	600×830
Shaft size	960×882
Cut out size	1000×993

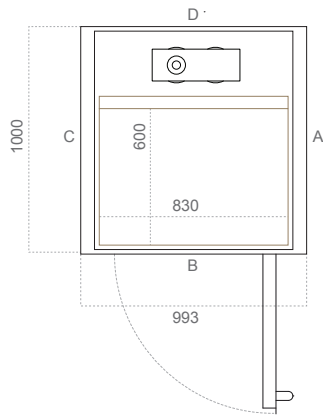


size S1 Cibes Classic/Voyager/Challenger W×D (mm)	
Platform size	800×830
Shaft size	1160×882
Cut out size	1200×993

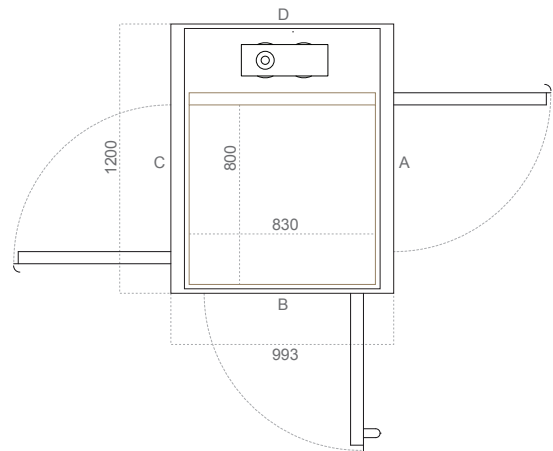

Door Opening Width (mm)		
Door Type	Side A/C	Side B
A10/A20 (steel)	-	700
AL5/AL6 (aluminium)	-	650
EI60/EI60G (fire rated)	-	-
A15/A25 (gate)	-	-


Door Opening Width (mm)		
Door Type	Side A/C	Side B
A10/A20 (steel)	700	700
AL5/AL6 (aluminium)	700	650
EI60/EI60G (fire rated)	700	-
A15/A25 (gate)	700	-

size S2 Cibes Classic/Voyager/Challenger W×D (mm)	
Platform size	900×830
Shaft size	1260×882
Cut out size	1300×993

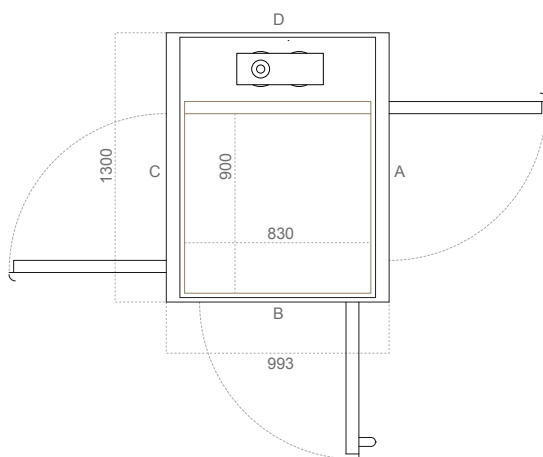

Door Opening Width (mm)		
Door Type	Side A/C	Side B
A10/A20 (steel)	800	700
AL5/AL6 (aluminium)	800	650
EI60/EI60G (fire rated)	800	-
A15/A25 (gate)	800	-


size S3 Cibes Classic/Voyager/Challenger W×D (mm)	
Platform size	1000×830
Shaft size	1360×882
Cut out size	1400×993

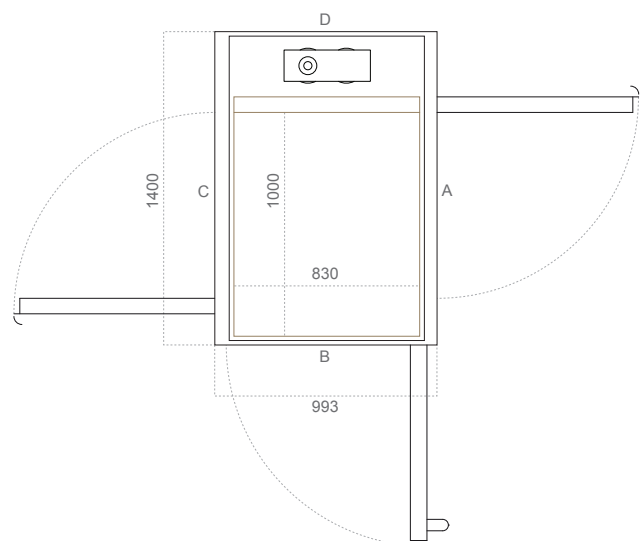

Door Opening Width (mm)		
Door Type	Side A/C	Side B
A10/A20 (steel)	900	700
AL5/AL6 (aluminium)	900	650
EI60/EI60G (fire rated)	900	-
A15/A25 (gate)	900	-


Cibes platform lift sizes

size S4 Cibes Classic/Voyager/Challenger W×D (mm)	
Platform size	800×930
Shaft size	1160×982
Cut out size	1200×1093

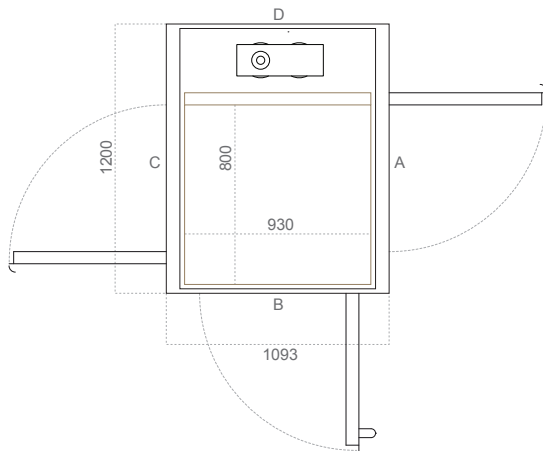


Door Opening Width (mm)		
Door Type	Side A/C	Side B
A10/A20 (steel)	700	800
AL5/AL6 (aluminium)	700	750
EI60/EI60G (fire rated)	700	-
A15/A25 (gate)	700	-

size S5 Cibes Classic/Voyager/Challenger W×D (mm)	
Platform size	900×930
Shaft size	1260×982
Cut out size	1300×1093

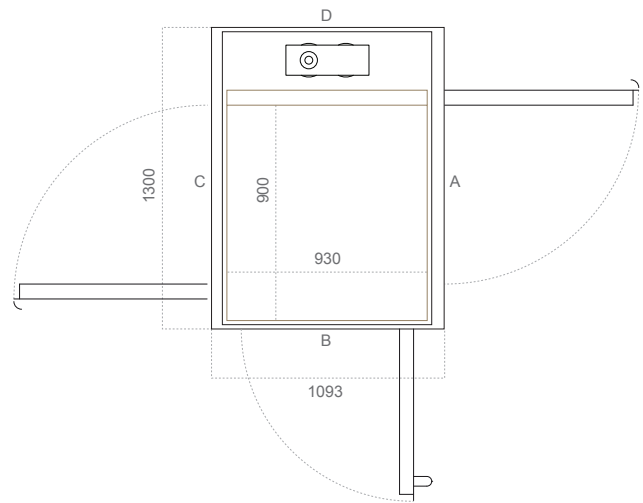


Door Opening Width (mm)		
Door Type	Side A/C	Side B
A10/A20 (steel)	800	800
AL5/AL6 (aluminium)	800	750
EI60/EI60G (fire rated)	800	-
A15/A25 (gate)	800	-

size S6 Cibes Classic/Voyager/Challenger W×D (mm)	
Platform size	1000×930
Shaft size	1360×982
Cut out size	1400×1093

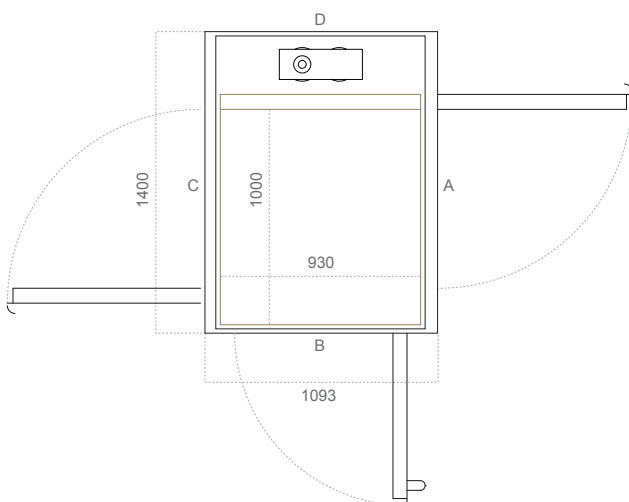

Door Opening Width (mm)		
Door Type	Side A/C	Side B
A10/A20 (steel)	900	800
AL5/AL6 (aluminium)	900	750
EI60/EI60G (fire rated)	900	-
A15/A25 (gate)	900	-


size S7 Cibes Classic/Voyager/Challenger W×D (mm)	
Platform size	1100×930
Shaft size	1460×982
Cut out size	1500×1093

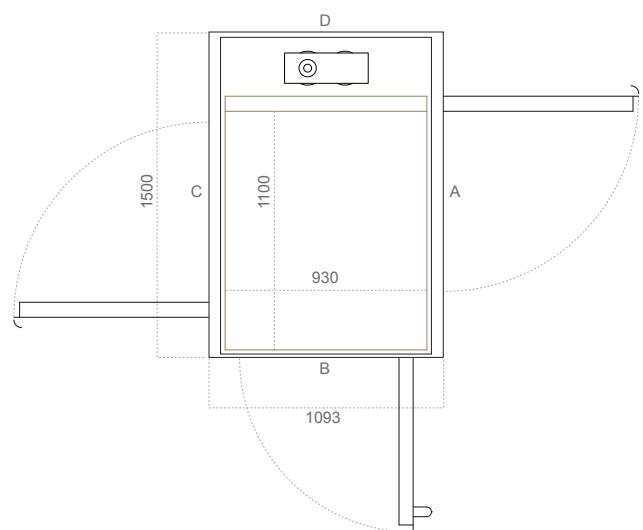


Door Opening Width (mm)		
Door Type	Side A/C	Side B
A10/A20 (steel)	900	800
AL5/AL6 (aluminium)	900	750
EI60/EI60G (fire rated)	900	-
A15/A25 (gate)	900	-

Cibes platform lift sizes

size M1 Cibes Classic/Voyager/Challenger W×D (mm)	
Platform size	800×1250
Shaft size	1160×1265
Cut out size	1200×1380

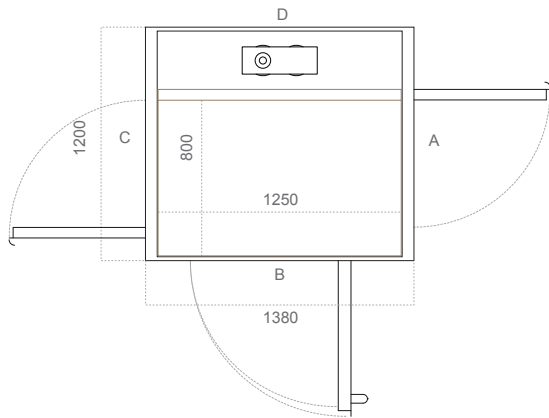


size M2 Cibes Classic/Voyager/Challenger W×D (mm)	
Platform size	900×1250
Shaft size	1260×1265
Cut out size	1300×1380

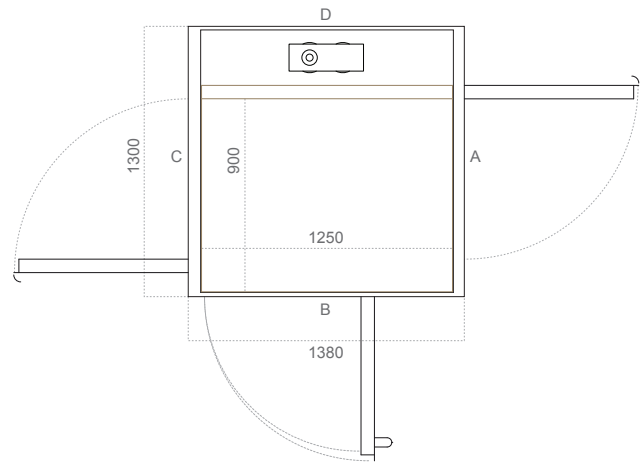

Door Opening Width (mm)		
Door Type	Side A/C	Side B
A10/A20 (steel)	700	750
AL5/AL6 (aluminium)	700	800
EI60/EI60G (fire rated)	700	750
A15/A25 (gate)	700	750


Door Opening Width (mm)		
Door Type	Side A/C	Side B
A10/A20 (steel)	800	750
AL5/AL6 (aluminium)	800	850
EI60/EI60G (fire rated)	800	750
A15/A25 (gate)	800	750

size M3 Cibes Classic/Voyager/Challenger W×D (mm)	
Platform size	1000×1300
Shaft size	1360×1315
Cut out size	1400×1430

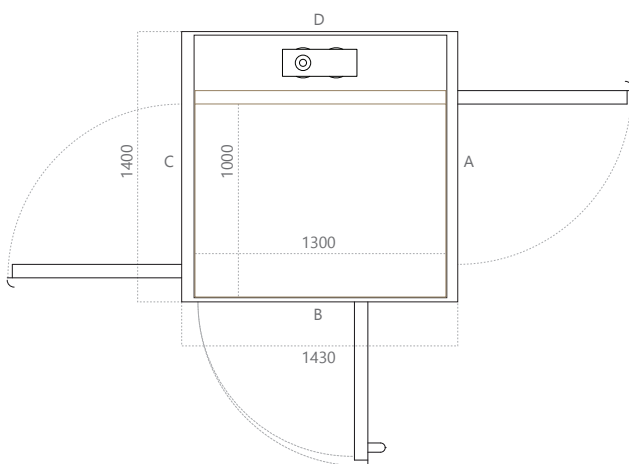

Door Opening Width (mm)		
Door Type	Side A/C	Side B
A10/A20 (steel)	900	800
AL5/AL6 (aluminium)	900	850
EI60/EI60G (fire rated)	900	800
A15/A25 (gate)	900	800


size M4 Cibes Classic/Voyager/Challenger W×D (mm)	
Platform size	1000×1400
Shaft size	1360×1415
Cut out size	1400×1530

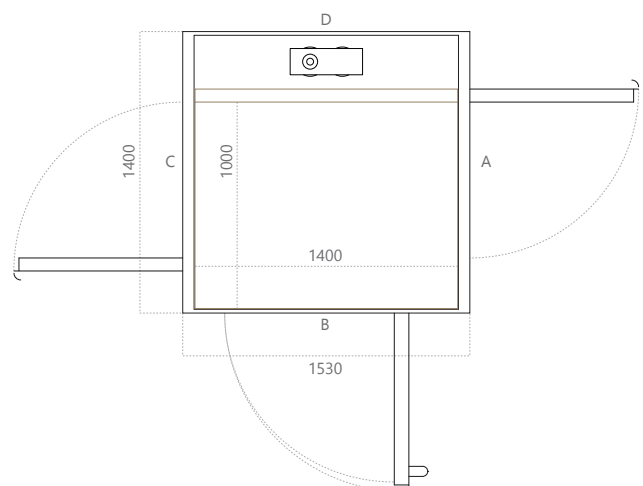


Door Opening Width (mm)		
Door Type	Side A/C	Side B
A10/A20 (steel)	900	900
AL5/AL6 (aluminium)	900	950
EI60/EI60G (fire rated)	900	900
A15/A25 (gate)	900	900

Cibes platform lift sizes

size L1 Cibes Classic/Voyager/Challenger W×D (mm)	
Platform size	1100×1400
Shaft size	1460×1415
Cut out size	1500×1530

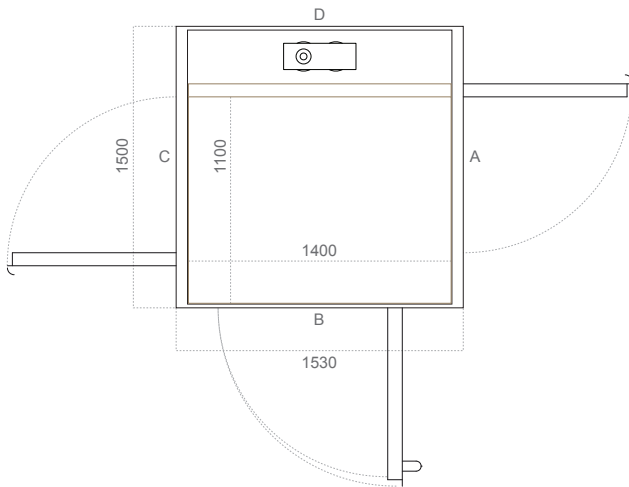


size L2 Cibes Classic/Voyager/Challenger W×D (mm)	
Platform size	900×1500
Shaft size	1260×1515
Cut out size	1300×1630

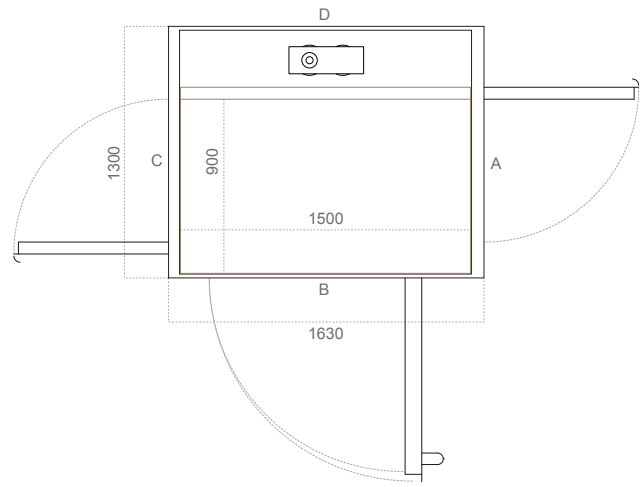

Door Opening Width (mm)		
Door Type	Side A/C	Side B
A10/A20 (steel)	900	900
AL5/AL6 (aluminium)	900	950
EI60/EI60G (fire rated)	900	900
A15/A25 (gate)	900	900


Door Opening Width (mm)		
Door Type	Side A/C	Side B
A10/A20 (steel)	800	1000
AL5/AL6 (aluminium)	800	1050
EI60/EI60G (fire rated)	800	1000
A15/A25 (gate)	800	1000

size L3 Cibes Classic/Voyager/Challenger W×D (mm)	
Platform size	1000×1500
Shaft size	1360×1515
Cut out size	1400×1630

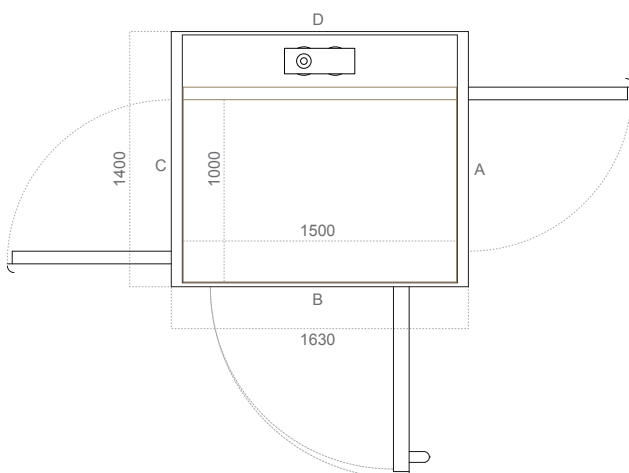

Door Opening Width (mm)		
Door Type	Side A/C	Side B
A10/A20 (steel)	900	1000
AL5/AL6 (aluminium)	900	1050
EI60/EI60G (fire rated)	900	1000
A15/A25 (gate)	900	1000


size L4 Cibes Classic/Voyager/Challenger W×D (mm)	
Platform size	1100×1500
Shaft size	1460×1515
Cut out size	1500×1630

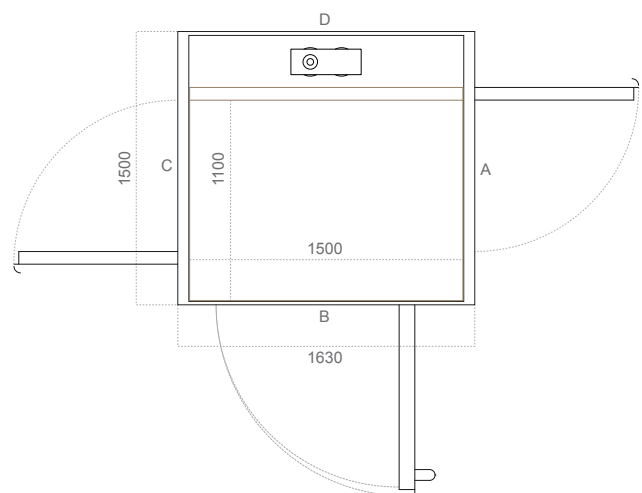

Door Opening Width (mm)		
Door Type	Side A/C	Side B
A10/A20 (steel)	900	1000
AL5/AL6 (aluminium)	900	1050
EI60/EI60G (fire rated)	900	1000
A15/A25 (gate)	900	1000

Cibes lift sizes

size XL Cibes Classic/Voyager/Challenger WxD (mm)	
Platform size	1100×1600
Shaft size	1460×1645
Cut out size	1500×1760

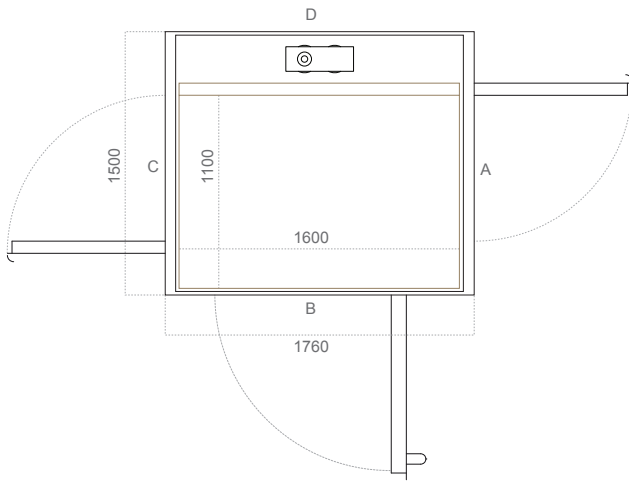

Door Opening Width (mm)		
Door Type	Side A/C	Side B
A10/A20 (steel)	900	1000
AL5/AL6 (aluminium)	900	1000
EI60/EI60G (fire rated)	900	1000
A15/A25 (gate)	900	-

Notes



Technical specifications Cibes Extra


Product name	Cibes Extra
Installation	Indoor/Outdoor
Rated load	1000 kg
Power supply	3×400 VAC, 50 Hz, 20 A, 5×2,5 mm ²
Speed	Max 0.15 m/s
Top height	2300 mm
Min headroom	2400 mm
Pit depth	130 mm
Directives & Standards	MD 2006/42/EC, applicable parts of EN 81-41, SIL3 (Safety Integrity Level 3)
Drive system	Screw and nut
Lift controls	One touch operation in platform and on landings
Control system	Micro computer based SIL3 (Safety Integrity Level 3)
Motor power	4.0 kW
Machine room	Machine room less (MRL)
Max number of stops	6
Max travel	13 m
Door configuration	Single hinged doors (L/R), single entry, open-through or adjacent access
Safety	Safety edges for the top of the platform and floor, overload protection, emergency stop and alarm button, telephone and battery emergency lowering are included as standard, various lock solutions and fire drive are available as options.
Lift shaft	Tempered and laminated safety glass (4.0 mm + 0.76 mm PVB foil + 4.0 mm) or steel panels.

Platform size	Platform (mm)		Shaft Size (mm)		Cut out size (mm)	
	Width	Depth	Width	Depth	Width	Depth
1	1000	2000	1360	2015	1400	2130
2	1405	1980	1825	2056	1895	2135
3	1405	2480	1825	2556	1895	2635
4	1105	2180	1525	2256	1595	2335

Note: Shaft and cut out sizes may vary depending on lift configuration. For exact measurements, please ask Cibes for project specific drawings.

Door models

Door glazing in laminated and tempered safety glass.

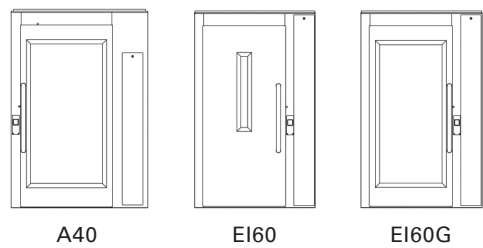

Doors for Cibes Extra			
Door model	A40	EI60 ¹	EI60G ¹
Door type	Single hinged	Single hinged	Single hinged
Material	Steel	Steel	Steel
Standard finish	RAL 9016	RAL 9016	RAL 9016
Glass (w×h) ² mm	800 × 1563	75×800	800×1563
Concealed opener	Yes	Yes	Yes
Ext. fitted opener	Option	Option	Option
Customised w×h	Yes	Yes	Yes


¹ Fire rated EI60 according to standard EN 81-58. EI60G only for platform size 1105×2180. Fire rated doors must always be combined with a site-built shaft with equivalent/superior fire rating, depending on your local regulations.

² Glass dimensions for doors of standard dimensions side A/C.




Cibes platform lift sizes

Lift size 1 Cibes Extra WxD (mm)	
Platform size	1000×2000
Shaft size	1360×2015
Cut out size	1400×2130

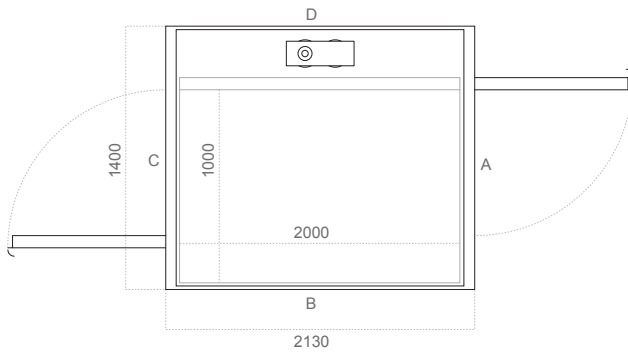


Lift size 2 Cibes Extra WxD (mm)	
Platform size	1405×1980
Shaft size	1825×2056
Cut out size	1895×2135

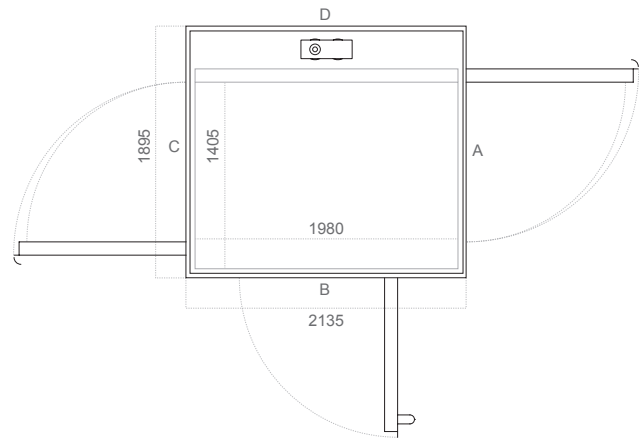


Door Opening Width (mm)		
Door Type	Side A/C	Side B
A10/A20 (steel)	900	-
AL5/AL6 (aluminium)	900	-
EI60/EI60G (fire rated)	900	-
A15/A25 (gate)	900	-

Door Opening Width (mm)		
Door Type	Side A/C	Side B
A40 (steel)	1300	1300
EI60 (fire rated)	1200	-

Lift size 3 Cibes Extra WxD (mm)	
Platform size	1405×2480
Shaft size	1825×2556
Cut out size	1895×2635

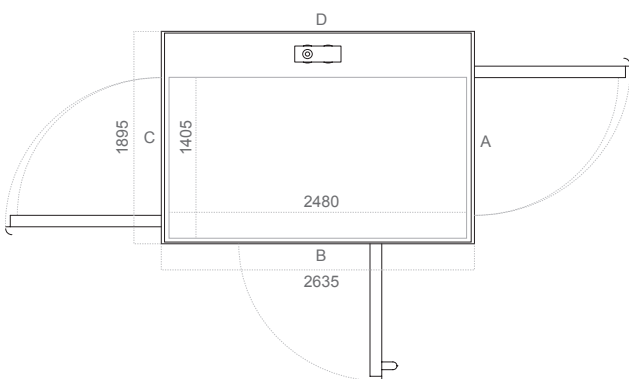


Lift size 4 Cibes Extra WxD (mm)	
Platform size	1105×2180
Shaft size	1525×2256
Cut out size	1595×2335

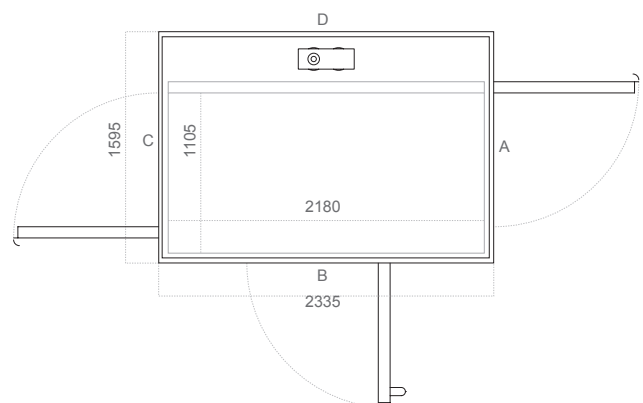

Door Opening Width (mm)		
Door Type	Side A/C	Side B
A40 (steel)	1300	1300
EI60 (fire rated)	1200	-

Door Opening Width (mm)		
Door Type	Side A/C	Side B
A40 (steel)	1000	1000
EI60 (fire rated)	1000	-

Examples of different configurations



Gate, open through.
2 landings.



Gate, adjacent,
2 landings.



Gate, single entry,
2 landings.



Full height doors, single entry.
2 landings.




Full height doors, open through.
2 landings.



Full height doors, adjacent.
2 landings.



Full height doors, open through.
3 landings.

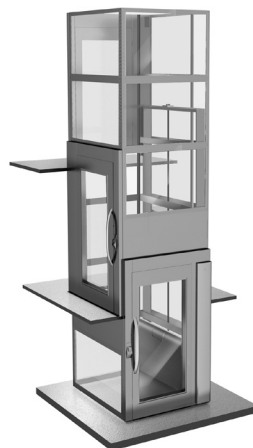

Full height doors, adjacent,
open through. 3 landings.



Full height doors, single entry.
3 landings.

Technical specifications Cibes C1 Pure

Product name	Cibes C1 Pure
Installation	Indoor/Outdoor
Rated load	525/630 kg ¹
Power supply	3×400 VAC , 50/60 Hz, 20 A, 5×2,5 mm ² or 1×230 VAC 50/60 Hz, 32 A 5×2,5 mm ²
Speed	0.15 m/s
Top height	2500 mm
Min headroom	2550 mm
Pit depth	100 mm
Directives & Standards	MD 2006/42/EC, applicable parts of EN 81-41, EN 81-20 and EN 81-70
Drive system	Screw and nut
Lift controls	One touch operation in cabin and on landings
Control system	Micro computer based SIL3 (Safety Integrity Level 3)
Motor power	4.0 kW
Machine room	Machine room less (MRL)
Max number of stops	6
Max travel	15 m
Min travel between floors, single entry	2500 mm
Min travel between floors, open-through	2400 mm. Above 3 m travel, 100 mm with 3×400 VAC power supply, or 500 mm, with 1×230 VAC.
Door configuration	Telescopic sliding doors with opening direction towards machinery side.
Safety	Alarm button, emergency telephone, emergency light, battery emergency lowering, battery monitoring, overload protection, infrared light curtain between doors. Maintenance light, fire drive and various lock systems as an option.
Lift shaft	Lift without shaft (for installation in masonry shaft) or with modular shaft in tempered and laminated safety glass (4.0 mm + 0.76 mm PVB foil + 4.0 mm) or steel panels.


¹385 kg with 1×230 VAC power supply. 1×230 VAC power supply is available for all cabin lift sizes except the 1100×1700×2130 mm.

Cabin size No	Cabin size (mm)			Cut out size, single entry (mm)		Cut out size, open-through (mm)	
	Width	Depth	Height	Width	Depth	Width	Depth
1a site built shaft	900	950	2130	1350	1240	1350	1410
1b modular shaft	900	950	2130	1410	1310	1410	1450
2a site built shaft	900	1200	2130	1350	1490	1350	1660
2b modular shaft	900	1200	2130	1410	1560	1410	1700
3a site built shaft	900	1400	2130	1350	1690	1350	1860
3b modular shaft	900	1400	2130	1410	1740	1410	1900
4a site built shaft	1100	1200	2130	1550	1490	1550	1660
4b modular shaft	1100	1200	2130	1610	1560	1610	1700
5a site built shaft	1100	1400	2130	1550	1690	1550	1860
5b modular shaft	1100	1400	2130	1610	1740	1610	1900
6a site built shaft	1100	1700	2130	1550	1990	1550	2160

Note: Shaft and cut out sizes may vary depending on lift configuration. For exact measurements, please ask Cibes for project specific drawings.

Door models

Cibes C1 Pure is equipped with automatic telescopic doors, for the landings and cabin. For your safety, there is a light curtain between the two sets of doors, which prevents the doors from closing if the light curtain is breached.

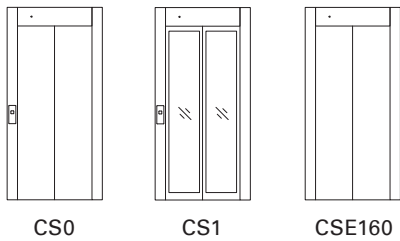

Doors for Cibes C1 Pure			
Door model	CS0 Steel Door	CS1 Glass door	CSE160 Fire rated door ¹
Door type	Telescopic sliding door	Telescopic sliding door	Telescopic sliding door
Number of door panels	2	2	2
Clear opening (w×h) mm	900×2100/750×2100	900×2100/750×2100	900×2100/-
Opening direction	Towards machinery side	Towards machinery side	Towards machinery side
Infrared light curtain	Standard	Standard	Standard
Cut out size (w×h) mm	1160×2300/1010×2300	1160×2300/1010×2300	1000×2300/-
Material	Steel	Steel/glass	Steel
Standard finish	White RAL 9016	White RAL 9016	White RAL 9016
Optional finish	Any RAL or Premium colour/stainless steel ¹	Any RAL or Premium colour	Any RAL or Premium colour
Glass (w×h) mm	-	370×1950/300×1950 mm	-

¹Landing door fire rated EI60 according to standard EN 81-58. Not available for cabin sizes 900×950/1200/1400 mm. Fire rated doors must always be combined with a site-built shaft with equivalent/superior fire rating, depending on your local regulations.


²Austenitic steel, designation EN1.4301/AISI 304, name X5CrNi18-10.

Cibes C1 Pure




Cibes cabin lift sizes

Lift size 1a single entry W×D (mm)	
Cabin dimensions (w×d×h)	900×950×2130
Cut out size (w×d) single entry	1350×1240

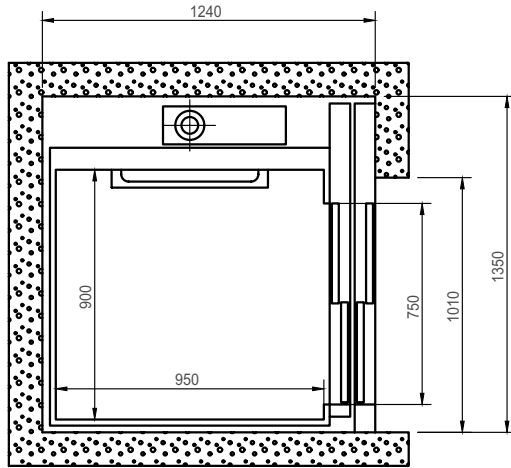


Door Opening Width (mm)	
Door Type	Side A/C
CS0/CS1	750

Lift size 1b single entry W×D (mm)	
Cabin dimensions (w×d×h)	900×950×2130
Cut out size (w×d) single entry	1410×1310

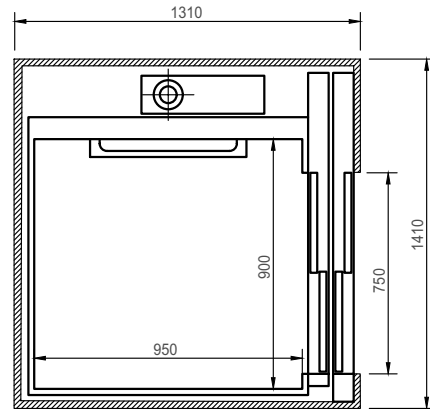


Door Opening Width (mm)	
Door Type	Side A/C
CS0/CS1	750

Lift size 1a open-through W×D (mm)	
Cabin dimensions (w×d×h)	900×950×2130
Cut out size (w×d) open-through	1350×1410

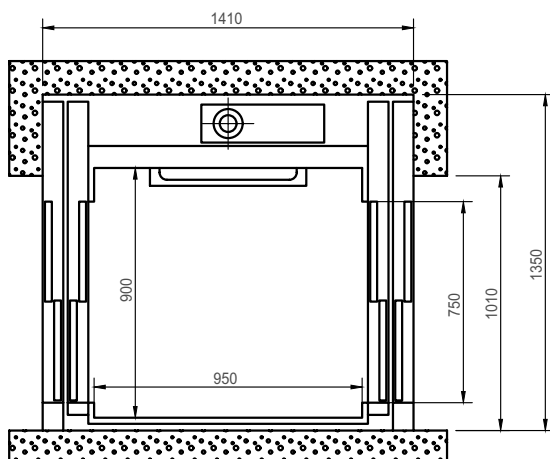

Door Opening Width (mm)	
Door Type	Side A/C
CS0/CS1	750


Lift size 1b open-through W×D (mm)	
Cabin dimensions (w×d×h)	900×950×2130
Cut out size (w×d) open-through	1410×1450

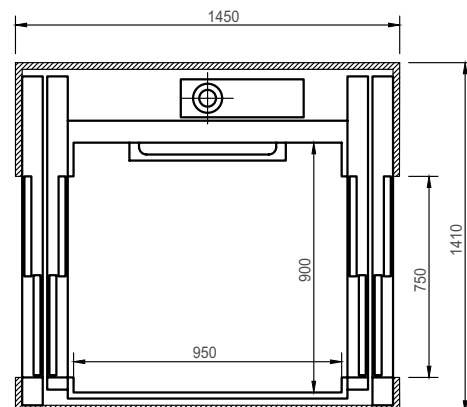

Door Opening Width (mm)	
Door Type	Side A/C
CS0/CS1	750


Cibes cabin lift sizes

Lift size 2a single entry W×D (mm)	
Cabin dimensions (w×d×h)	900×1200×2130
Cut out size (w×d) single entry	1350×1490

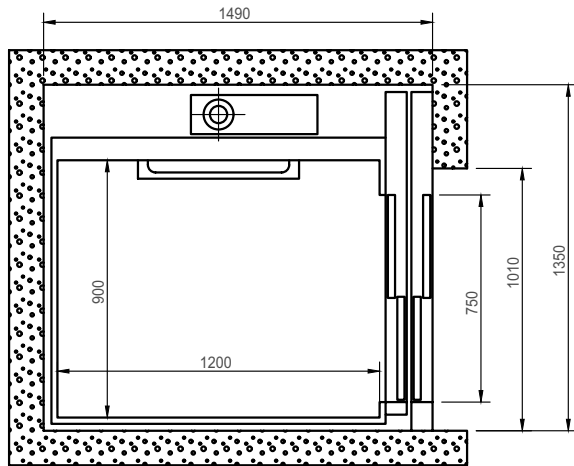


Door Opening Width (mm)	
Door Type	Side A/C
CS0/CS1	750

Lift size 2b single entry W×D (mm)	
Cabin dimensions (w×d×h)	900×1200×2130
Cut out size (w×d) single entry	1410×1560

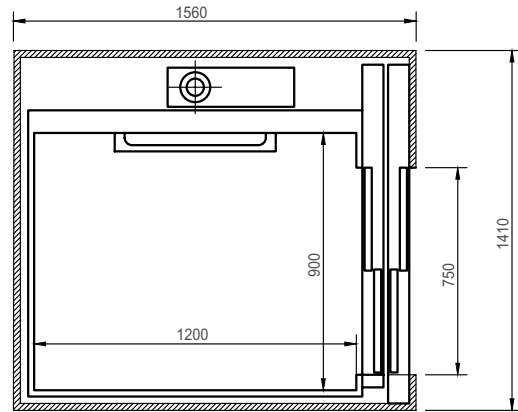


Door Opening Width (mm)	
Door Type	Side A/C
CS0/CS1	750

Lift size 2a open-through W×D (mm)	
Cabin dimensions (w×d×h)	900×1200×2130
Cut out size (w×d) open-through	1350×1660

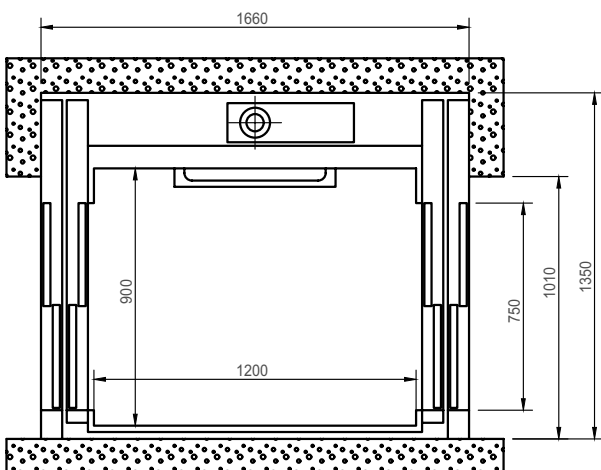

Door Opening Width (mm)	
Door Type	Side A/C
CS0/CS1	750


Lift size 2b open-through W×D (mm)	
Cabin dimensions (w×d×h)	900×1200×2130
Cut out size (w×d) open-through	1410×1700

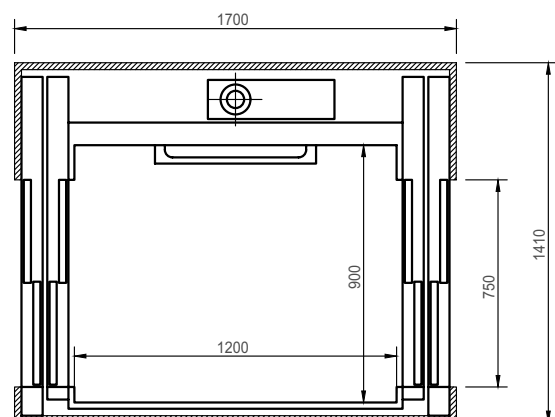

Door Opening Width (mm)	
Door Type	Side A/C
CS0/CS1	750


Cibes cabin lift sizes

Lift size 3a single entry W×D (mm)	
Cabin dimensions (w×d×h)	900×1400×2130
Cut out size (w×d) single entry	1350×1690

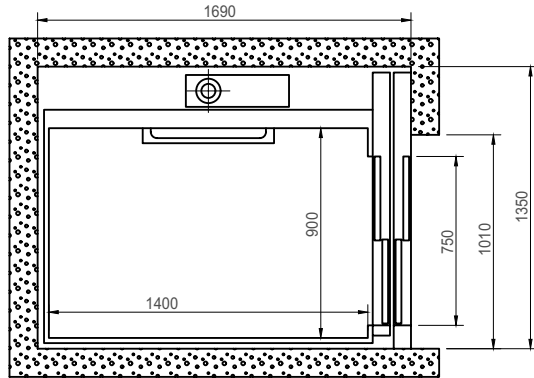


Door Opening Width (mm)	
Door Type	Side A/C
CS0/CS1	750

Lift size 3b single entry W×D (mm)	
Cabin dimensions (w×d×h)	900×1400×2130
Cut out size (w×d) single entry	1410×1740

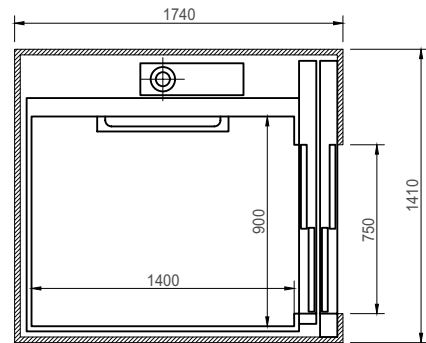


Door Opening Width (mm)	
Door Type	Side A/C
CS0/CS1	750

Lift size 3a open-through W×D (mm)	
Cabin dimensions (w×d×h)	900×1400×2130
Cut out size (w×d) open-through	1350×1860

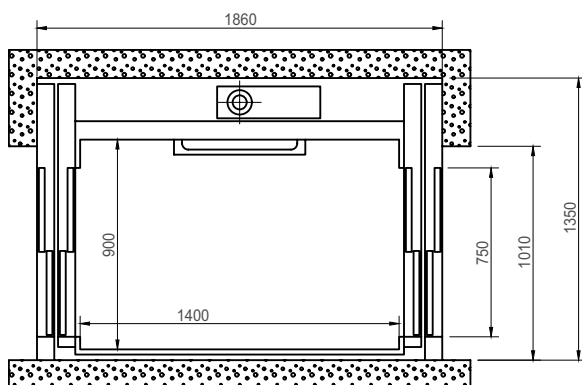

Door Opening Width (mm)	
Door Type	Side A/C
CS0/CS1	750


Lift size 3b open-through W×D (mm)	
Cabin dimensions (w×d×h)	900×1400×2130
Cut out size (w×d) open-through	1410×1900

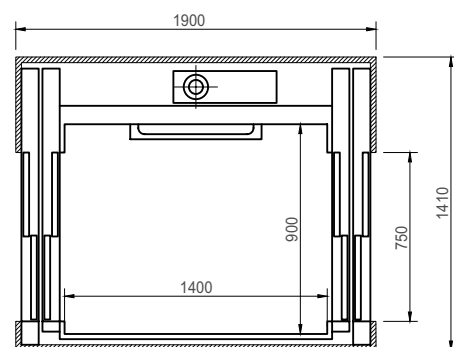


Door Opening Width (mm)	
Door Type	Side A/C
CS0/CS1	750

Cibes cabin lift sizes

Lift size 4a single entry W×D (mm)	
Cabin dimensions (w×d×h)	1100×1200×2130
Cut out size (w×d) single entry	1550×1490

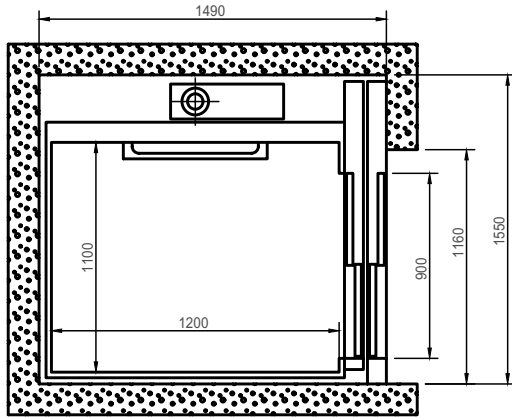


Lift size 4b single entry W×D (mm)	
Cabin dimensions (w×d×h)	1100×1200×2130
Cut out size (w×d) single entry	1610×1560

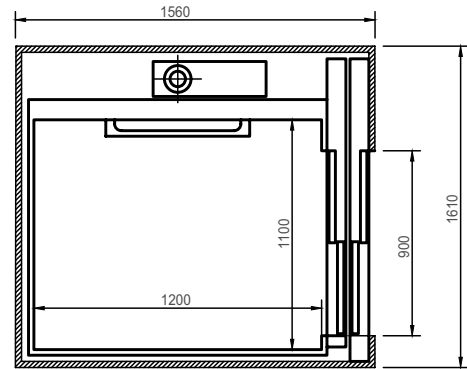


Door Opening Width (mm)	
Door Type	Side A/C
CS0/CS1	900
CSEI60 (fire rated)	900

Door Opening Width (mm)	
Door Type	Side A/C
CS0/CS1	900
CSEI60 (fire rated)	900

Lift size 4a open-through W×D (mm)	
Cabin dimensions (w×d×h)	1100×1200×2130
Cut out size (w×d) open-through	1550×1660

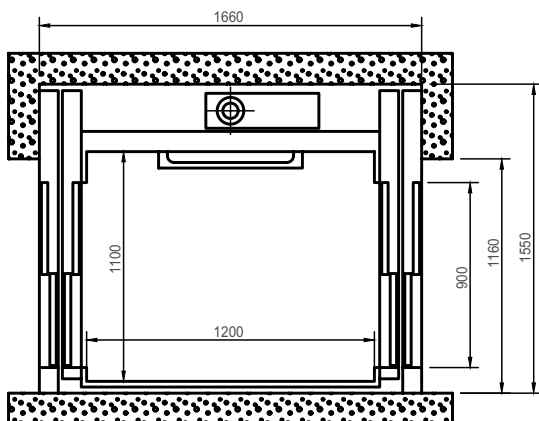

Lift size 4b open-through W×D (mm)	
Cabin dimensions (w×d×h)	1100×1200×2130
Cut out size (w×d) open-through	1610×1700

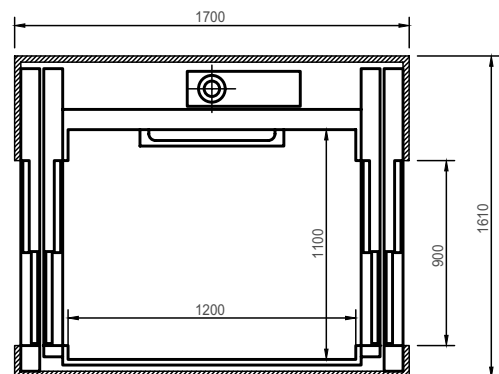


Door Opening Width (mm)	
Door Type	Side A/C
CS0/CS1	900
CSEI60 (fire rated)	900


Door Opening Width (mm)	
Door Type	Side A/C
CS0/CS1	900
CSEI60 (fire rated)	900

Cibes cabin lift sizes

Lift size 5a single entry W×D (mm)	
Cabin dimensions (w×d×h)	1100×1400×2130
Cut out size (w×d) single entry	1550×1690

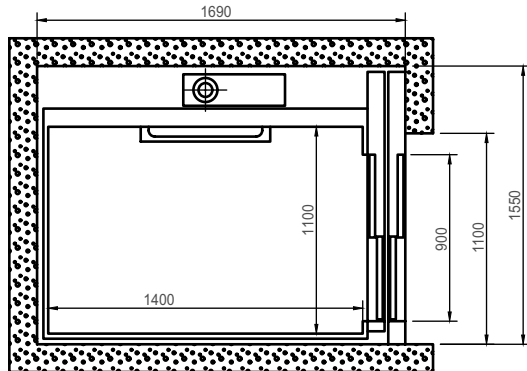


Lift size 5b single entry W×D (mm)	
Cabin dimensions (w×d×h)	1100×1400×2130
Cut out size (w×d) single entry	1610×1740

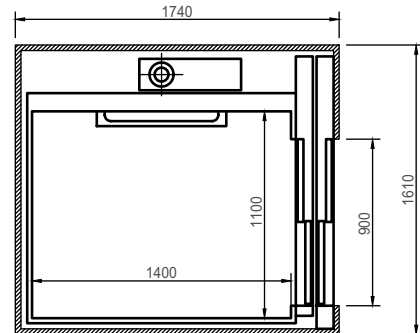


Door Opening Width (mm)	
Door Type	Side A/C
CS0/CS1	900
CSEI60 (fire rated)	900

Door Opening Width (mm)	
Door Type	Side A/C
CS0/CS1	900
CSEI60 (fire rated)	900

Lift size 5a open-through W×D (mm)	
Cabin dimensions (w×d×h)	1100×1400×2130
Cut out size (w×d) open-through	1550×1860

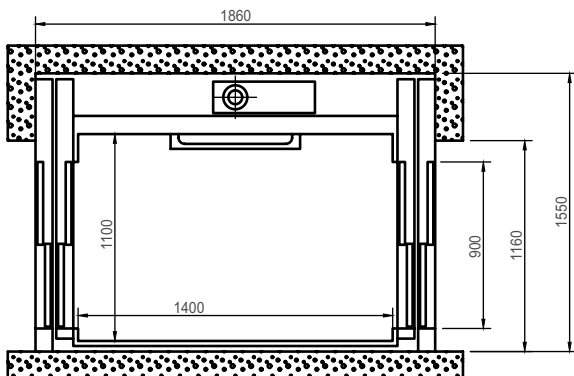

Lift size 5b open-through W×D (mm)	
Cabin dimensions (w×d×h)	1100×1400×2130
Cut out size (w×d) open-through	1610×1900

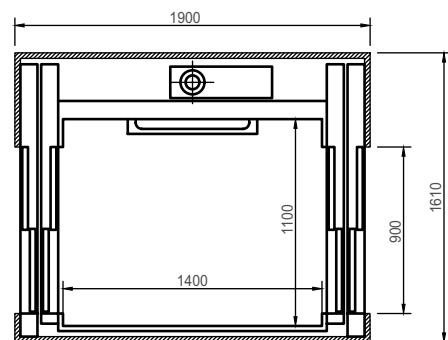


Door Opening Width (mm)	
Door Type	Side A/C
CS0/CS1	900
CSEI60 (fire rated)	900

Door Opening Width (mm)	
Door Type	Side A/C
CS0/CS1	900
CSEI60 (fire rated)	900


Cibes cabin lift sizes

Lift size 6a single entry W×D (mm)	
Cabin dimensions (w×d×h)	1100×1700×2130
Cut out size (w×d) single entry	1550×1990

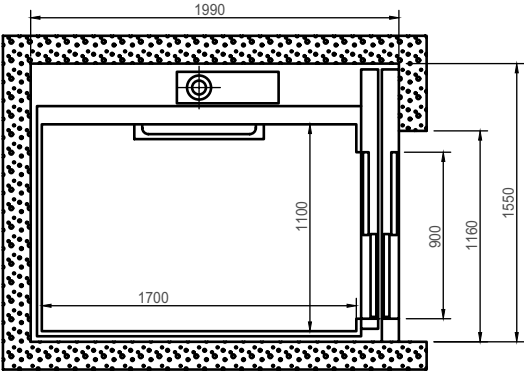

Door Opening Width (mm)	
Door Type	Side A/C
CS0/CS1	900
CSEI60 (fire rated)	900

Lift size 6a open-through W×D (mm)	
Cabin dimensions (w×d×h)	1100×1700×2130
Cut out size (w×d) open-through	1550×2160

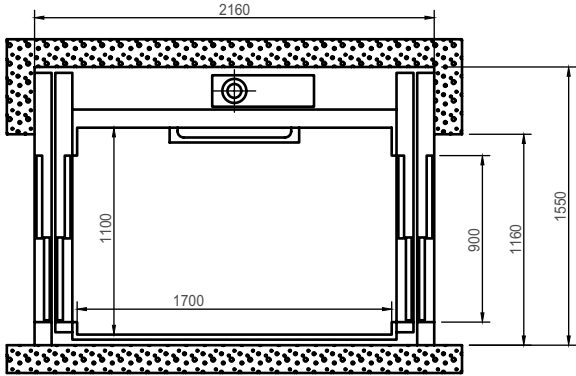

Door Opening Width (mm)	
Door Type	Side A/C
CS0/CS1	900
CSEI60 (fire rated)	900

Notes



Notes





Cibes Lift (Thailand) Co., Ltd. 891/49-52 Rama 3 Road, Bangpongpan, Yannawa, Bangkok 10120

Head Office : 02 114 6500, Email : thailand@cibeslift.com (Mon-Fri, 09.00-18.00)

Sales Hotline : 02 114 6499, Email : support_th@cibeslift.com (24 Hrs.)

www.cibeslift.co.th