

## Cibes B385

The perfect accessibility solution, with an open platform lift for all kind of building environments

### Open platform lift – Key features

- Quick installation ready to use the same day
- Robust and reliable screwdriven operation
- Finishes in grey powder coating in RAL 9006 or stainless steel
- Does not require a separate machine room
- Rated load: 385 kg, 3 persons
- Travel height: < 3 m
- 60 mm pit or ramp
- Tactile braille push buttons
- Emergency light and emergency stop button
- Low operating costs and low power consumption
- Tested and approved according to the Machinery Directive 2006/42/EC. The lift is CE marked.



TECHNICAL INFORMATION	B385
Lift location	Indoors and outdoors
Rated load	385 kg /3 pers
Rated speed (m/sec)	Max 0.06
Travel height	Max 3 m
Pit depth	60 mm
Plattform dimension (mm)	1100 × 1400
Footprint dimension (mm)	1490 × 1520
Plattform dimension (mm)	1100 × 1600
Footprint dimension (mm)	1490 × 1720
Maximum number of stops	2
Mast, platform, door frame finish	Powder coated grey, RAL 9006
Landing gate configuration	Swing door/900x1100 mm
Driving system	Screw and nut
Control system	PLC
Standard power supply	3 × 400VAC 10A 1 × 230VAC 16A (option)
Motor power	1.5 kW
Control buttons	Hold to run
Floor	Aluminium Checker Plate
Machine room	Integrated
In compliance with	MD 2006/42/EG


For more product details and information about the product and accessory selection, contact Cibes Lift Thailand.

This product information is general and we reserve the right to modify product design and specifications. No claims shall be construed as warranties or conditions, express or implied, of any product, its fitness for a particular purpose or quality. Minor deviations in color reproduction can occur. © Cibes Lift Thailand



## ADAPTABLE ACCESS

Cibes B385 is available with a great choice of different access configurations to fit any project.

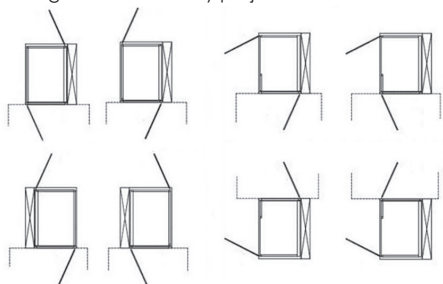

## PLATFORM SIZES

